



This drawing may not be copied without our approval. It may also not be shared with a third party or used unauthorized. Breaching will be prosecuted due to current laws.

No.	Qty.	Changes and/or mess.-no	Date	Sign	Appr.

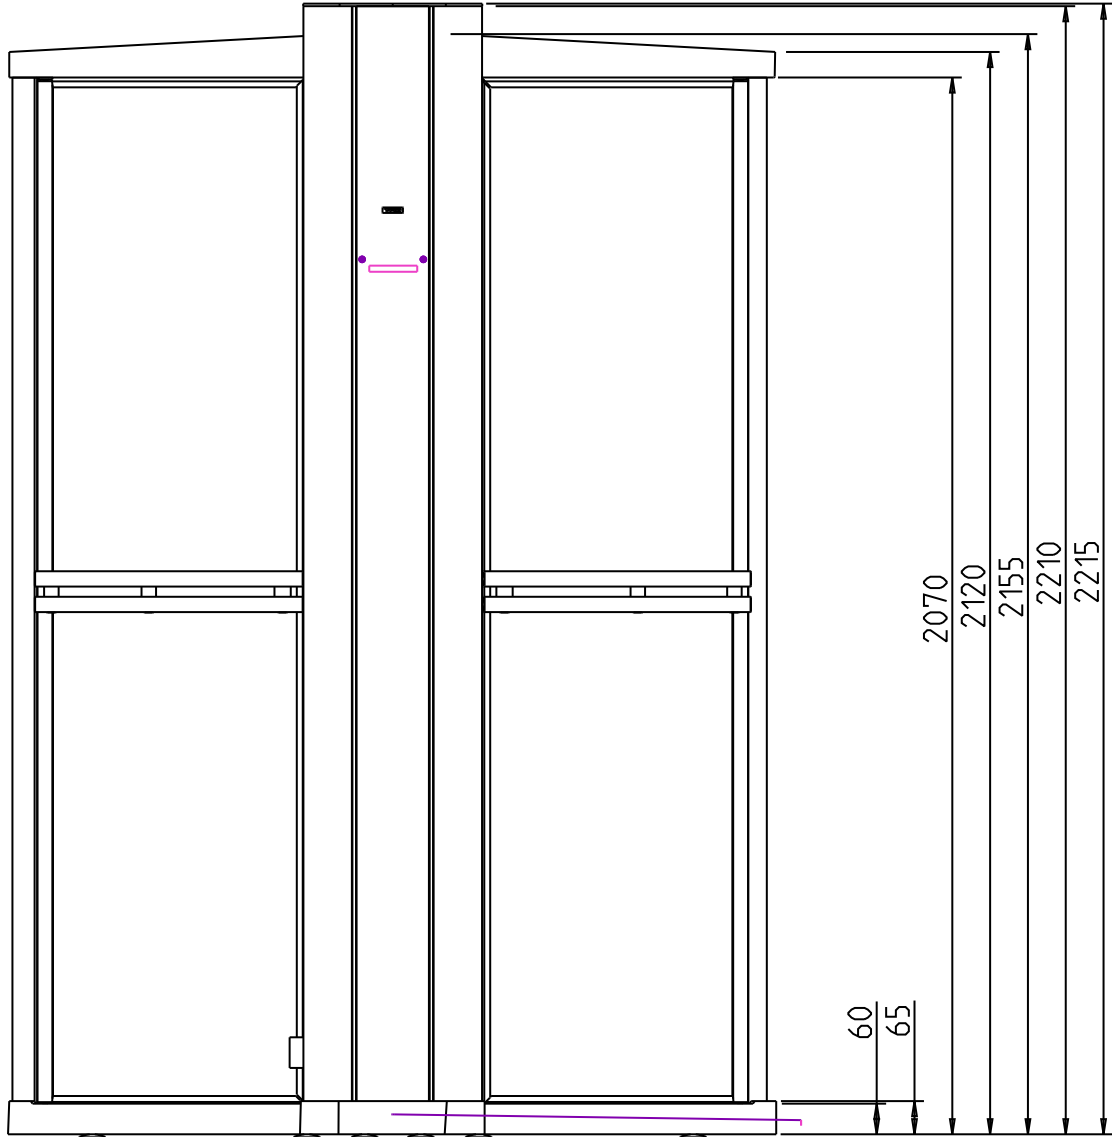

Design			Tolerance for other dimensions			Material		Article no.	
JO			Inspected			Thickness		96074520	
Drawing			Approved			Replaces		Replaced by	
JU			Scale			1 of 1		Date	
Copied			27:400			Rev.		16-May-07	
			Description				1		Drawing no.
							Felicity Premium		25900-C

# Tylö Felicity Steam Shower

## Shower Tray Measures/Installation help



Image A

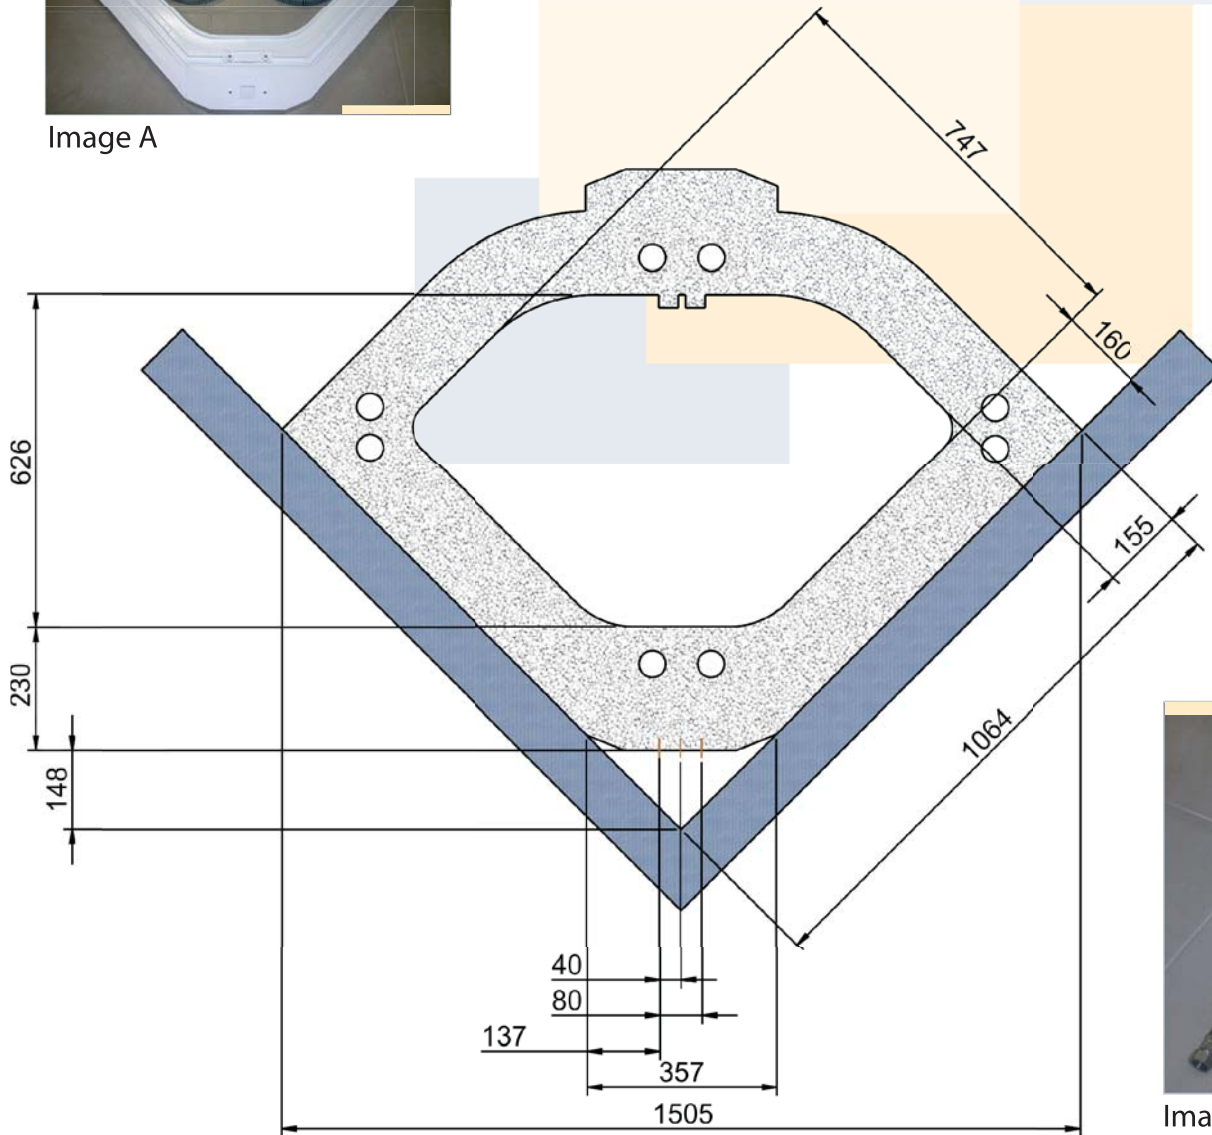


Image B

The floor drain should be located within the inner area of the tray, the hoses are cuttable for correct adjustment. (image A)

The two markings in the rear center of the tray (c/c 80) indicates where the two hoses (approximately 300 mm each, 70 mm above floor level) used for the water inputs (hot and cold) are located (Image B).

The marking in the rear center indicates the position of the conduit entry for the main power supply, 160 mm above floor level (image B).

The white circles in the tray indicates where the adjustable feet are located.