

TYLÖ®



S A U N A S

S H O W E R S

S T E A M B A T H S

Steam saunas at home.

Steam saunas are a variation on the traditional sauna concept that we can warmly recommend. The difference is that you enjoy a steam sauna at a lower temperature, but with much higher humidity (up to 70%). In practice, this means a more gentle, more relaxing bathing sensation – a “soft sauna” as it is sometimes described.

To enjoy the relaxing properties of a steam sauna at home, simply choose a Tylö Combi heater. It's the perfect choice for all types of sauna bathing – dry, wet, or in clouds of soothing steam. And you can enhance the experience with the fragrance of natural herbs or liquid essences. For the same effect in public facilities, simply complement a Tylö SD sauna heater or a floor-mounted Mega heater with a separate VA steam generator.

State-of-the-art features

The Tylö Combi is a sophisticated heater that you can use for all types of sauna bathing: a dry sauna at temperatures of 70–110°C in a relative humidity (RH) of 5–35%; a traditional sauna at temperatures of 75–90°C in 20–35% RH; or a gently relaxing steam sauna at 45–65°C in 40–65% RH. And with built-in dispensers for natural herbs and liquid essences, Tylö Combi adds yet another dimension to your sauna.

Tylö Combi includes all the hallmark features of other high quality Tylö heaters – and more besides! Innovations include:

- 3 hours running time, 0–10 hour preset
- light diodes indicating time, temperature and bathing mode
- integral humidifier for a pleasant bathing climate during the heating-up time
- stainless steel water tank with integral, replaceable heating element
- electronic low-water cut-off function
- automatic drying function after completion of the steam sauna cycle

Transform your old sauna into a brand new steam sauna!

You can easily upgrade an ordinary sauna into a steam sauna by replacing the old heater with a new Tylö Combi. To add even more style and sophistication, select your favourites from the wide range of doors, glazed sections, interior fittings and sauna accessories in the extensive Tylö range.



Control panels CC

Electronic model for remote or touch-control operation. May also be connected to an external switch or computer, or used to turn the sauna on and off via a phone line. Features include an energy-saving divided output and automatic drying function after a steam sauna. Control panels must be combined with a suitable sauna heater, relay box and steam generator as shown in the table below.



CC 20-3 (Art. 7111 3010)

Light diodes indicate temperature, humidity and time settings on a 1–10 scale. Max. 3 hours running time. 0–10 hour preset. Size: 100 x 150 mm, depth 30 mm.


CC 20-10 (Art. 7111 3012)

As above, but with 10 hours running time.



CC 200 (Art. 7111 5113)

Switchable between 3 and 12 hours running time or continuous operation. 24-hour pre-programming facility. Display for tem-

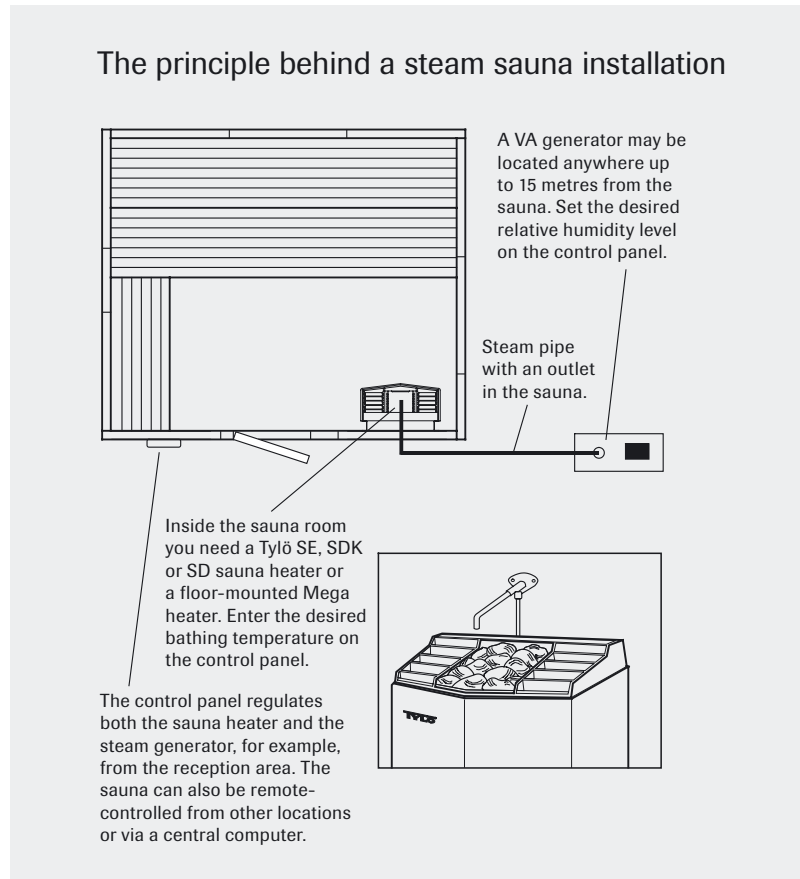

Read more about Tylö sauna heaters and steam generators for professional use under the relevant section.

perature, humidity and time with instructions in 7 languages. Also features switch for sauna lighting, clock with unlimited back-up power in the event of electricity cuts, security code, plus an energy-saving stand-by function (see description on right). The CC 200 also has a built-in weekly timer that stores details of automatic on/off times, day-by-day temperature/humidity settings and up to 4 different bathing programmes per day. Size: 130 x 190 mm, depth 40 mm.

Stand-by function saves energy – and money!

During off-peak hours the sauna can be set at stand-by heat. This can then be rapidly increased to the desired temperature when bathers arrive.

Stand-by operation saves substantial sums every year.

Combination table

Sauna volume min/max (cu.m.)	Sauna heater type (kW)	Relay box (see page 63)	Steam generator (see pp. 114–115) type (kW)	Control panel (see above)
6 – 12	SE 8 (8)	–	6 VA (6) or 6 VB (6.6)	CC 20 or CC 200
10 – 18	SDK 10 (10,7) or EP 100 (10)	RB 30	6 VA (6) or 6 VB (6.6)	
15 – 35	SD 16 (16) or EH 150 (15)	RB 30	9 VA (9)	
22 – 43	SD 20 (20) or EZ 225 (22)	RB 60	12 VA (12)	

Registered office, factory and warehouse:
Svarvaregatan 6, SE-302 50 Halmstad, Sweden
Tel: +46 35-299 00 00 • Fax: +46 35-299 01 98
E-mail: info@tylo.se • Website: www.tylo.com

TYLÖ®
www.tylo.com